

AHT Rio S G GSGW

PERFECT FOR PACKAGED ICE CREAM AND LOLLIES

Key Benefits:

- Excellent product visibility
- Ready to plug in
- Easy to move
- Environmentally friendly
- Bespoke branding
- Very simple maintenance
- Adjustable thermostat

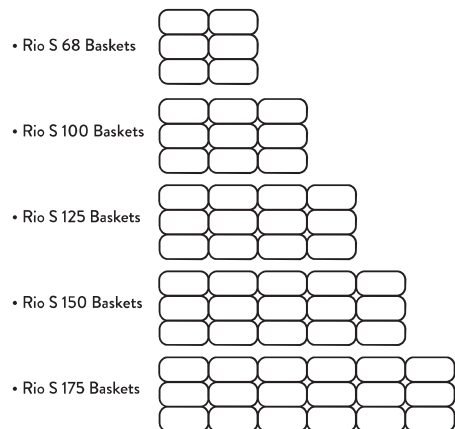


Table Energy Efficiency Class		
Label	EEI from / to	
A	0	9.9
B	10	19.9
C	20	34.9
D	35	49.9
E	50	64.9
F	65	79.9
G	80	109.9
H	110	



AHT
a member of **DAIKIN** group

	68 G CSGW	100 G CSGW	125 G CSGW	150 G CSGW	175 G CSGW	
Dimensions						
gross content	141	252	339	426	513	Litre
net content	102	190	258	327	396	Litre
total display area (TDA)	0,25	0,41	0,54	0,66	0,79	m ²
length outside / inside	680 / 530	1000 / 850	1250 / 1100	1500 / 1350	1750 / 1600	mm
depth outside / inside	650 / 500	650 / 500	650 / 500	650 / 500	650 / 500	mm
height outside front / rear	769 / 883	769 / 883	769 / 883	769 / 883	769 / 883	mm
stacking height front / rear	530 / 570	530 / 570	530 / 570	530 / 570	530 / 570	mm
net weight	51	69	73	83	85	kg
gross weight	54	75	80	91	92	kg
Operation						
ambient temperature (min ... max)	16 ... 35	16 ... 35	16 ... 35	16 ... 35	16 ... 35	°C
ambient humidity (RH) (min ... max)	80 ... 75	80 ... 75	80 ... 75	80 ... 75	80 ... 75	%
recommended temperature(s) for optimised food storage	-18	-18	-18	-18	-18	°C
sound pressure in 1 m distance	39	39	40	40	43	dB(A)
blowing agent	R-601 (HC) GWP 5	-	-	-	-	
Electrical supply						
nominal voltage / frequency	220-240 / 50	220-240 / 50	220-240 / 50	220-240 / 50	220-240 / 50	V / Hz
nominal power max. acc. EN 60335-2-89	240	280	320	320	370	W
nominal current max. acc. EN 60335-2-89	2,1	2,3	2,8	2,8	3,7	A
fuse protection	RCBO, 30mA, C10	-	-	-	-	
length of power supply cord	1750	1750	1750	1750	1750	mm
Energy consumption						
daily energy consumption* Edaily	1,31	1,78	3,05	3,10	3,68	kWh/24h
annual energy consumption AE	477,87	650,09	1112,93	1129,70	1343,06	kWh/a
HVAC						
rejected heat capacity*	55	74	127	129	153	W
dehumidification*	0	0	0	0	0	Litre/24h
Refrigeration system						
refrigerant type	R-290 (HC) GWP3	-	-	-	-	
refrigerant charge max. acc. EN 60335-2-89	0,050	0,060	0,075	0,085	0,080	kg
max. allowable operating pressure	30	30	30	30	30	bar

RIO S	68 G CSGW	100 G CSGW	125 G CSGW	150 G CSGW	175 G CSGW
Type of refrigerating appliance with a direct sales function	Ice cream freezer	-	-	-	-
Use	Display & Sale	-	-	-	-
Temperature class acc. EN 16901	C1	C1	C1	C1	C1
Climate class acc. EN 16901	B	B	B	B	B
Cabinet family code acc. EN 16901	ICFT	ICFT	ICFT	ICFT	ICFT
Energy efficiency index EEI	39,5 %	41,7 %	45,9 %	52,9 %	56,5 %
Energy efficiency class	D	D	D	E	E

Functioning Environment: Our Freezers are designed to work at room temperature between 16°C and 35°C degrees and 70% humidity (Class 7).

Beyond those thresholds the cabinets functions may be affected and it will be necessary to check the stores temperature. We recommend the use of air conditioning.

*Please note. There is room to store extra products under the baskets of the Rio units.

We cool, you sell

AHT Cooling Systems (UK) Ltd • Unit C • Mill Court • Featherstone Road • Wolverton Mill • Milton Keynes • MK12 5EU
Phone - +44 1280 826 600 • Email - info@ahat.at